

Hollow Metal Door Preparation – Hinges

Recommended by factory for models:

www.markar.com

HG-105

HG-305


HG-310

HG-322

HG-326

HG-3505

Added Reinforcement for
Adjusta-Screw Assembly

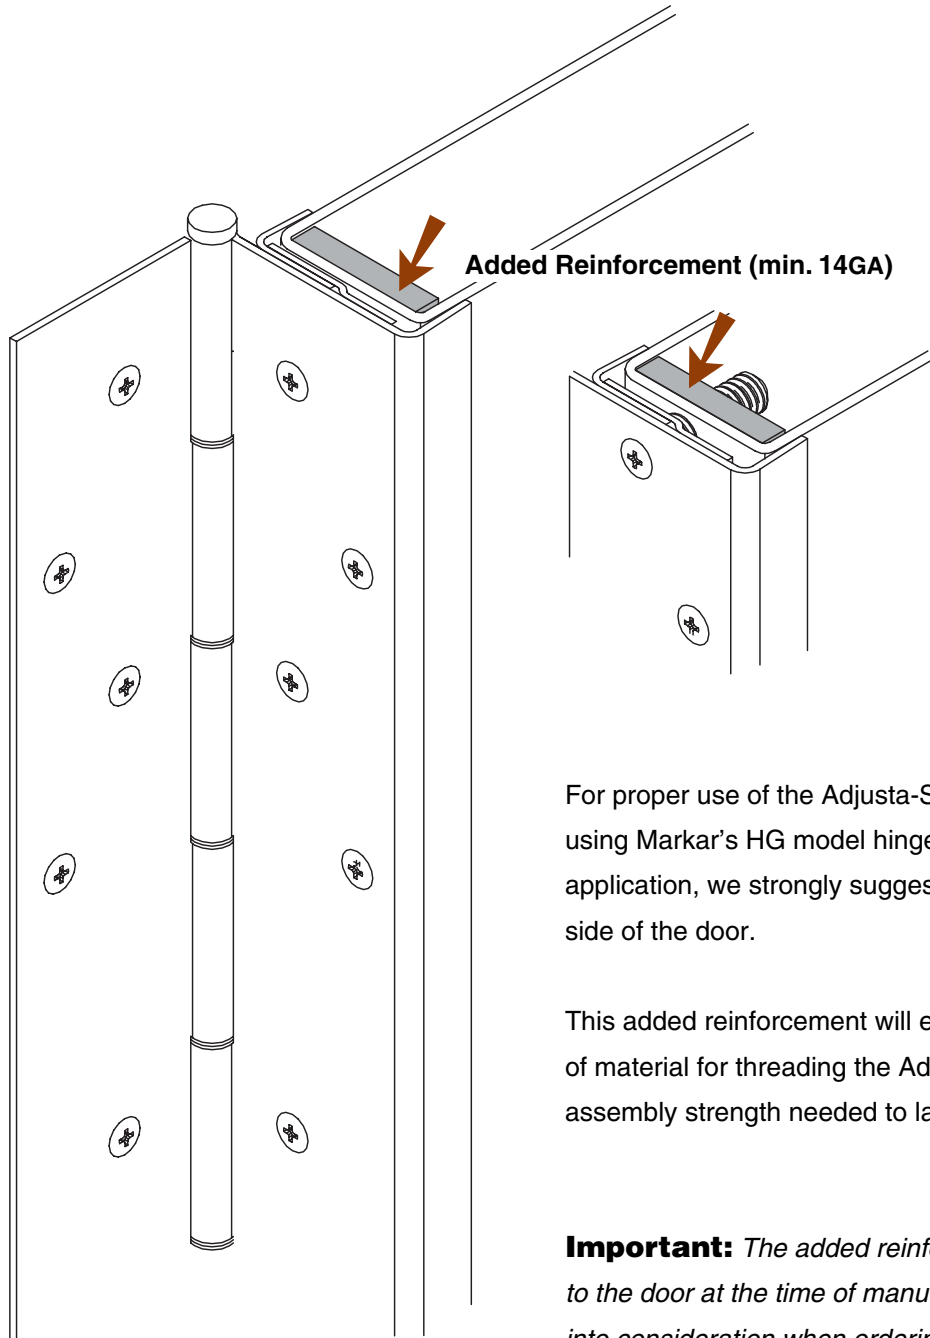

For proper use of the Adjusta-Screw Assembly when using Markar's HG model hinges for a hollow metal door application, we strongly suggest reinforcement at the hinge side of the door.

This added reinforcement will ensure the correct amount of material for threading the Adjusta-Screw, providing the assembly strength needed to last for the life of the door.

Important: *The added reinforcement must be added to the door at the time of manufacture – please take this into consideration when ordering your doors. This added reinforcement is only appropriate for the Adjusta-Screw assembly.*



ASSA ABLOY