



ASSA ABLOY

HG-311 Swing Clear Hinge Guard

Markar Architectural Products, Inc. a subsidiary of Adams Rite Manufacturing Co.
260 Santa Fe Street, Pomona, CA 91767 • 800-872-3267 • 909-632-2300 • 800-232-6752 fax • www.markar.com

STANDARD FEATURES

Material

Heavy-duty 14 Gauge stainless steel

Finishes

US32D Satin Stainless Steel (630)

Cycle Testing

Grade 1

ANSI/BHMA Standard A156.26

Mounting Hardware

No exposed mounting fasteners when closed

Universal screw pack

Capacity

Supports weights up to 600lbs.

4'0" maximum door width

Sizes

6'8", 7'0", 7'2", 8'0", 10'0"

Hole Pattern


Symmetrically templated

Non-handed

Barrel Type Hinge

1/4" diameter stainless steel pin

Long-life split nylon bearings

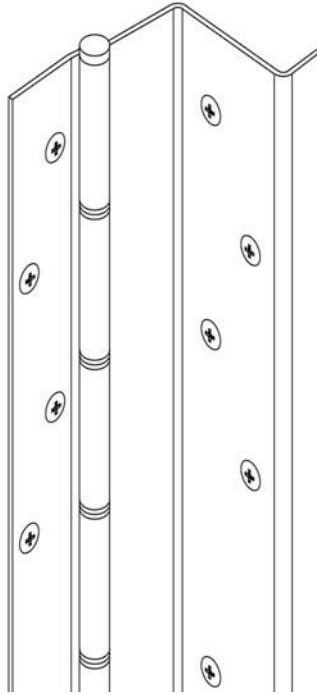

OPTIONAL FEATURES

Finishes

US32 Bright Stainless Steel (629)

Scratch-Resistant Powder Coated Paint

Other Features

Custom lengths - specify in inches

Custom hole patterns

Dutch door hinges - suffix hinge "DD"

Hospital tips - suffix hinge "HT"

Medical Bearings

Swing clear hinges for ADA compliance

Raised barrel


Special sheared leaf

Fasteners

Tamper-proof security screws

Tools

MTSP-100 Right angle skewdriver for ease of installation



Electrical Modifications

Current Transfer Prep - suffix hinge "CTP" (4612-SC)

Fire Rating

3 hours - hollow metal doors mounted singly

90 minutes - hollow metal and composite core wood fire doors

20 minutes - wood doors



Classified in accordance with UBC code standard 7-2 for positive pressure



fire-rated label

This surface applied swing clear version allows doors to meet ADA requirements. The single wrap protects door edges from cart damage.

