


Adams Rite 4612 Electric Power Transfer

www.markar.com

Installation

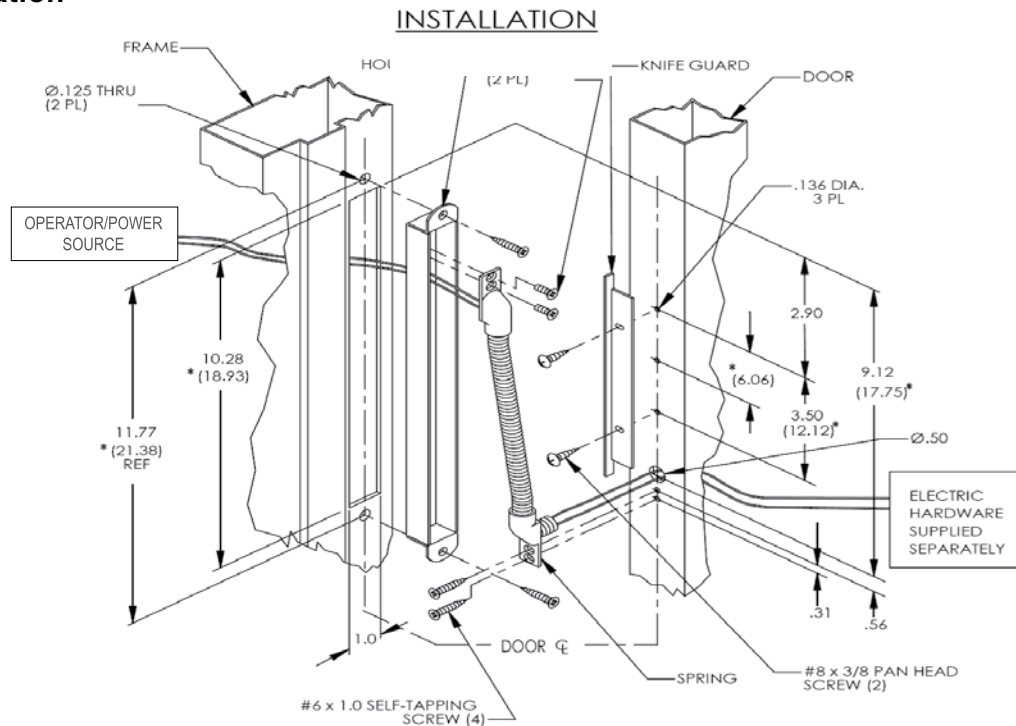

Conduit: Spring steel helix has internal diameter of approximately 5/16". This provides ample room for multiple wires of the low voltage type used with most electrical hardware.

Housing: Stamped steel, approximately 1/16" thick. Short (105° swing) version 12 3/4" long. 180° version is 21 3/8" long.

Finish: Chrome

Cast-Knife Guard: Particularly for out-swinging doors, a steel barrier fence offers extra protection against attack on the conduit by knives, shims or other tools. Guard is completely hidden when door is closed.

Function: Provides a secure and unobtrusive means of channeling electrical wiring from door frame into door itself for powering electric strikes, locks, exit bars, etc. Suitable for any door hung with butt-type hinges, continuous hinges, or pivots offset 3/4" or less.



ASSA ABLOY