



# Hollow Metal Door Preparation - Hinges

**Markar Architectural Products, Inc.** a subsidiary of Adams Rite Manufacturing Co.  
260 Santa Fe Street, Pomona, CA 91767 800-872-3267 909-632-2300 800-232-6752 fax

**ASSA ABLOY**

Recommended by factory on models

[www.markar.com](http://www.markar.com)

HG-105

HG-305


HG-310

HG-322

HG-326

HG-3505

Added reinforcement for  
Adjusta-Screw Assembly

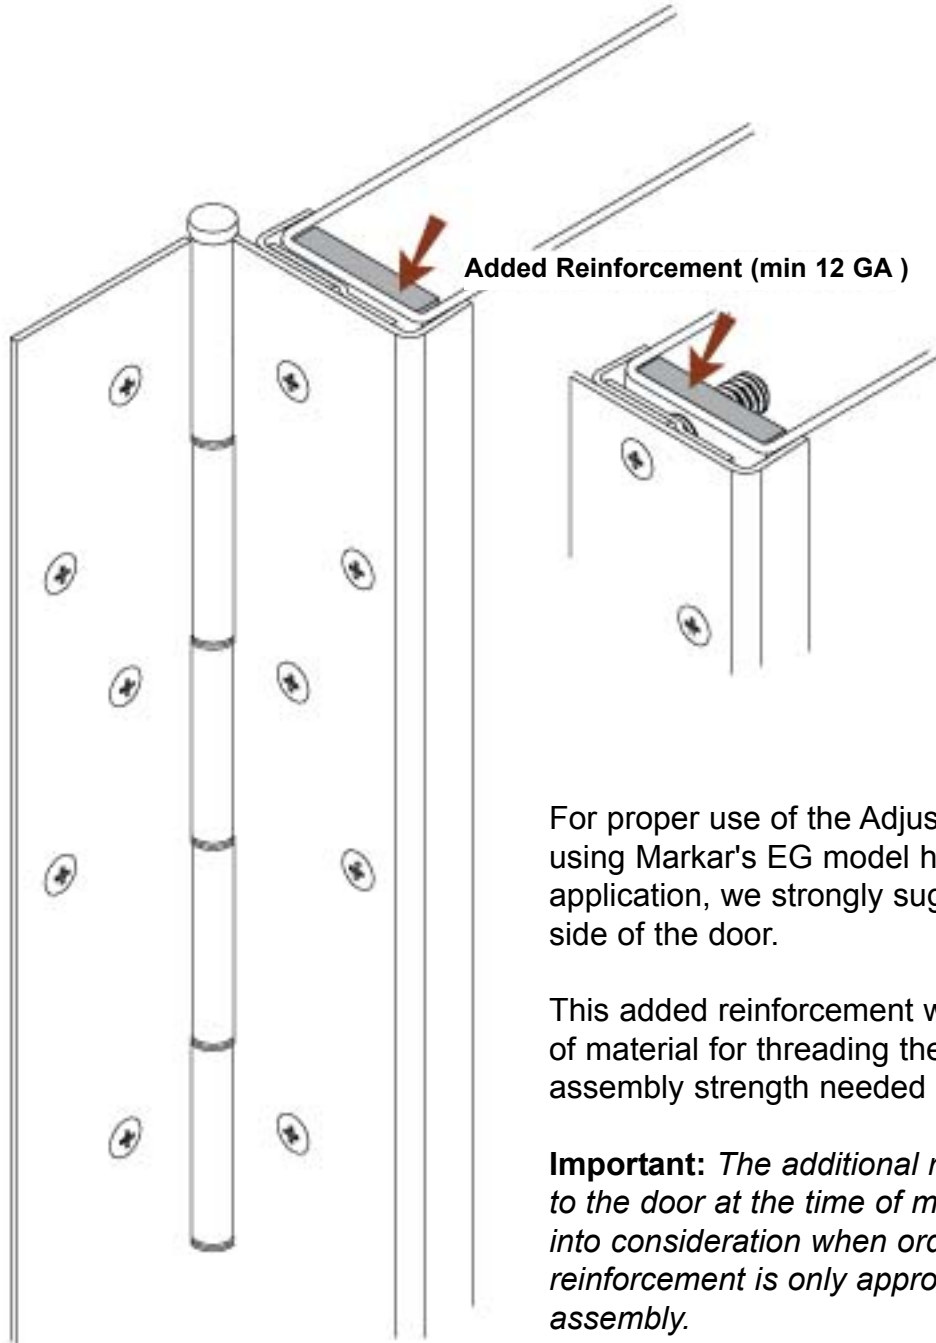

For proper use of the Adjusta-Screw Assembly when using Markar's EG model hinges for a hollow metal door application, we strongly suggest reinforcement at the hinge side of the door.

This added reinforcement will ensure the correct amount of material for threading the Adjusta-Screw, providing the assembly strength needed to last for the life of the door.

**Important:** *The additional reinforcement must be added to the door at the time of manufacture - please take this into consideration when ordering your doors. This added reinforcement is only appropriate for the Adjusta-Screw assembly.*