



ASSA ABLOY

FS-101 Full Surface 1/8" Inset

Markar Architectural Products, Inc. a subsidiary of Adams Rite Manufacturing Co.
260 Santa Fe Street, Pomona, CA 91767 • 800-872-3267 • 909-632-2300 • 800-232-6752 fax • www.markar.com

STANDARD FEATURES

Material

6063-T6 aluminum

Finishes

Satin Anodized (628)
Dark Bronze Anodized (313)

Cycle Testing

Grade 2
ANSI/BHMA Standard A156.26

Mounting Hardware

No exposed mounting fasteners

Capacity

Supports weights up to 600lbs.
4'0" maximum door width

Sizes


6'8", 7'0", 7'2", 8'0"

Locking Security Covers

Brushed aluminum finish

Barrel Type Hinge

1/4" diameter Teflon-coated stainless steel pin
Long-life split nylon bearings

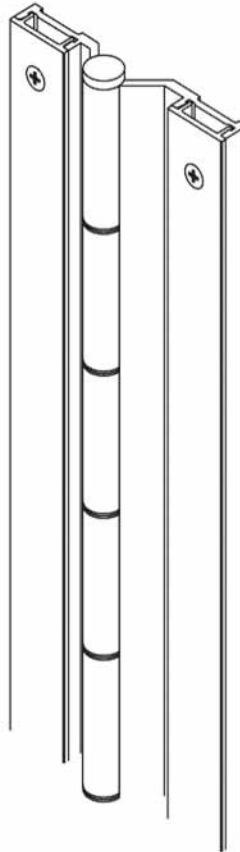

OPTIONAL FEATURES

Finishes

Light Bronze Anodized (311)
Black Anodized (315)
Scratch-Resistant Powder Coated Paint
Satin Anodized

Other Features

Custom lengths - specify in inches
1 3/4" aluminum sleeve bolts
Dutch door hinges - suffix hinge "DD"
Hospital tips - suffix hinge "HT"
Lead lined cover with 1/16" lead lining -
suffix hinge "LL"

Electrical Modifications

Current transfer - 4 or 8 28 gauge wires -
suffix hinge "CE4" or "CE8"

ElectroLYNX™

EL-8 (8 wire), EL-12 (12 wire)

This surface-mounted pin & barrel type continuous hinge is the correct hinge to solve door sag problems. The 1/8" inset allows perfect alignment for retrofitting hollow metal, wood or aluminum doors within the existing conditions - no need to readjust your weather-stripping!

